

HAFI Flush Line – Design 238/880

Maintenance-free door handle set with stainless steel sub-construction and spring loaded, pivot-mounted, quick mounting by the “Push-Click”-function, optionally also suitable for flush mounting in the door leaf, with rosettes and escutcheons, invisible fixation


200.000 movement cycles with certificate
 free movement < 0.5 mm
 free angular movement < 0.5 mm

Classification key according to DIN EN 1906

47 - **B**140**B**

- Satin stainless steel
- Polished stainless steel
- PVD coating
- SoftTouch coating

Design 218
not DIN EN 179 compliant

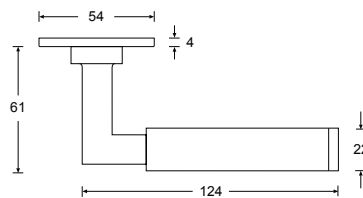

Design 238
DIN EN 179 compliant
only with 9 mm square pin available

