



 Reduced height of rosettes
4mm


Flush mounting



RAL-colour on request

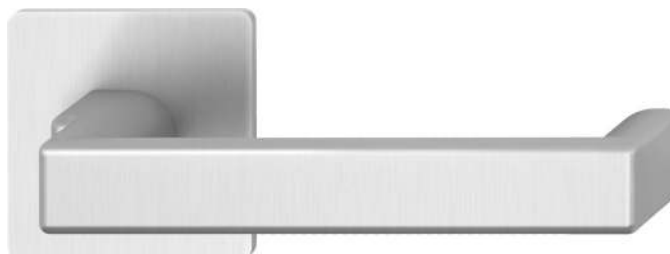

DIN EN 179



DIN 18273

HAFI Flush Line – Design 241P/880

Maintenance-free door handle set with stainless steel sub-construction and spring loaded, pivot-mounted, quick mounting by the “Push-Click”-function, optionally also suitable for flush mounting in the door leaf, with rosettes and escutcheons, invisible fixation

200.000 movement cycles with certificate
 free movement < 0.5 mm
 free angular movement < 0.5 mm

Classification key according to DIN EN 1906

47-B140B

- ☒ Satin stainless steel
- ☐ Polished stainless steel
- ☐ PVD coating
- ☐ SoftTouch coating

