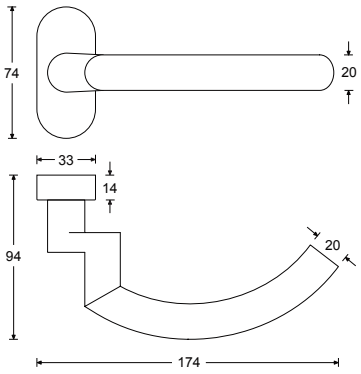

DIN EN 179 DIN 18273

HAFI Public Line – Design 307/788

Door handle on oval rosette, spring loaded, assembled right or left handed, invisible fixation

Spindle 9 mm, Spindle 8 mm

1.000.000 movement cycles
free movement < 0.5 mm
free angular movement < 0.5 mm

Classification key according to DIN EN 1906
4 7* - B 1 5 0 B
*Durability tested with 1.000.000 cycles

Door handle on oval rosette, spring assisted, right/left handed, invisible fixation

Spindle 9 mm, Spindle 8 mm

Classification key according to DIN EN 1906
4 7 - B 1 5 0 A

- ■ Satin stainless steel
- □ Polished stainless steel
- □ PVD coating