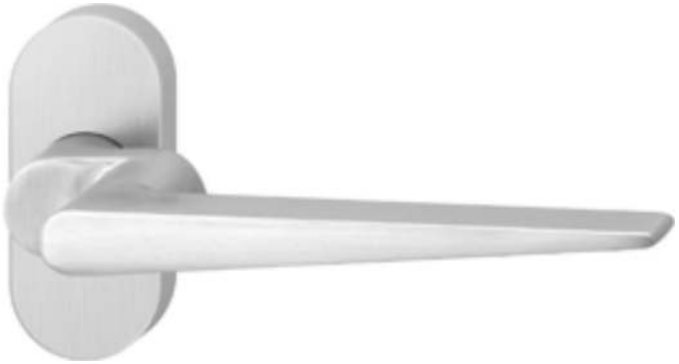

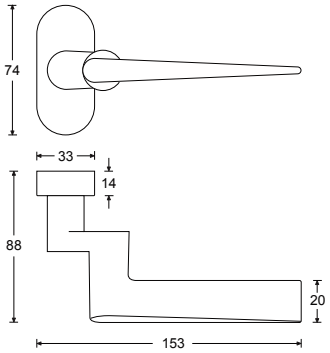

F
DIN 18273

HAFI Public Line – Design 328/788

Door handle on oval rosette, spring loaded, assembled right or left handed, invisible fixation

Spindle 9 mm, Spindle 8 mm F

1.000.000 movement cycles
free movement < 0.5 mm
free angular movement < 0.5 mm

Classification key according to DIN EN 1906
4 | 7* | - | B | 1 | 5 | 0 | B
*Durability tested with 1.000.000 cycles

Door handle on oval rosette, spring assisted, right/left handed, invisible fixation

Spindle 9 mm, Spindle 8 mm F

Classification key according to DIN EN 1906
4 | 7 | - | B | 1 | 5 | 0 | A

- ■ Satin stainless steel
- ☐ Polished stainless steel
- ☐ PVD coating
- ☐ SoftTouch coating