

HAFI Public Line – Touchbar Design 763

Mechatronic design with integrated door monitoring with alarm function (alarm sound) with key switch

This model can be operated either by a 9 V battery including integrated battery monitoring or by a power supply with connection cable. The battery monitoring is checking the voltage every 10 hours. If the voltage drops below 7 V, a short acoustic signal sounds every 60 seconds.

For profile frame and full leaf doors, metal or wood, tested with panic lock according to EN 1125 and EN 1634. Intended for mounting on single-leaf and two-leaf smoke protection and fire protection doors.


Flush resting on the door with low building height (83 mm). DIN left and DIN right handed usage up to a leaf width of 1,600 mm.

Very sturdy version (vandal-proof) made of stainless steel.

The Touchbar is delivered in three different lengths which can be shortened individually and adapted perfectly to every door.

- length 970 mm (can be shortened by 180 mm)
- length 1,130 mm (can be shortened by 160 mm)
- length 1,290 mm (can be shortened by 160 mm)

■ Satin stainless steel

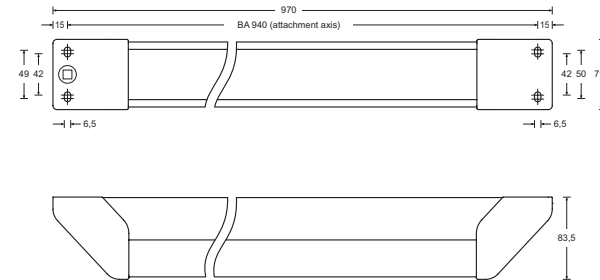

HAFI Public Line – Touchbar Design 762

Design with potential-free contact with alarm function (alarm sound) without key switch

This model is a push rod with an additional potential-free contact for evaluating the positioning of the door. There is a signal when the Touchbar is pressed, which is terminated as soon as the door is closed again.

For profile frame and full leaf doors, metal or wood, tested with panic lock according to EN 1125 and EN 1634. Intended for mounting on single-leaf and two-leaf smoke protection and fire protection doors.

Flush resting on the door with low building height (83 mm). DIN left and DIN right handed usage up to a leaf width of 1,600 mm.

Very sturdy version (vandal-proof) made of stainless steel.

The Touchbar is delivered in three different lengths which can be shortened individually and adapted perfectly to every door.

- length 970 mm (can be shortened by 180 mm)
- length 1,130 mm (can be shortened by 160 mm)
- length 1,290 mm (can be shortened by 160 mm)

■ Satin stainless steel