HAFI (

Living space

The World of Door Handles – Product Overview



info

About HAFI Information about HAFI	(
Mix it! Create your door handle	8
Brilliant metal PVD - Gems	10
SoftTouch It's time for colour.	12
Safety first! Safety certifications	14
Flush Line Flush-mounted aesthetics and reduced rosette design.	40
Change it! Push and Click	44

classic exclusive

Classic. Timeless. Distinct.	16
Door handles	18
Lavatory rosettes	26
Window handles	27
Protective fittings	28
Lifting-sliding door handles	35
Door stops	36
Accessories	38

Exclusive. Extraordinary. Elegant.	46
Door handles	48
Window handles	60
Protective fittings	64
Lifting-sliding door handles	71

About

HAFI Beschläge GmbH – giving the best to our customers around the world since 1978.

Since 1978

Hans Fink founded HAFI in 1978, today the company is managed by René Fink and Jochen Maier.

We develop and manufacture fittings for customers around the world from our location in Elchingen, Germany. Our employees share our passion and give their best to our customers every day. In 2018, HAFI manufactured 450,000 fitting pieces for doors and windows.

Fitting products - we shape fine steel

HAFI produces a number of fitting products out of stainless steel. The shape and surface finish can be produced individually.

Whether matte-brushed or polished, stainless steel surfaces are durable, elegant and timeless. Thanks to the exceptionally smooth and non-porous surface, stainless steel handles are very dirt-resistant and long-lasting.

Customised to meet the customer's wishes

We turn our customer's ideas into reality, and accompany you from concept creation and prototype construction to multi-trade delivery of the item.

With PVD-coating or the SoftTouch surface, we can produce fittings in any colour with various surface finishes.

Multi-trade

We have the right solution for any building type and any requirement. For door handles for residential building to electronic locking systems in public buildings.

Easy installation

Our fittings prove that design and technology can go hand in hand. One example is our latest development – Flush Line technology for windows, doors and lifting-sliding doors.






Mix it!

Create your door handle.

1 • Select your handle rosette.

Round 1-piece Round 2-piece Square 1-piece Square 2-piece

2. Select the keyhole rosette.

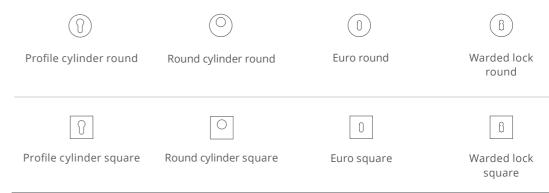

3. Select your surface.

HAFI SoftTouch - Select your custom colour!

With the SoftTouch surfaces – Made in Germany – we not only add colour to the daily stainless steel experience, we also add a touch & feel element. Select one of our standard colours or ask us about your custom colour request.




Midnight Blue Red more colour shades on request

PVD - create highlights with metallic colours!

Rosé-gold, bronze, brass or black – create highlights with PVD-coated fittings. In addition to brilliant colour intensity, the PVD-coating also shines with excellent resistance to scratches and wear.

The PVD surfaces are available in a matte and polished version.




Brilani metal

Turn your fittings into gems with PVD-coating.

Rosé-gold, bronze, brass or black – create highlights with PVD-refined fittings. In addition to brilliant colour intensity, the PVD-coating also shines with excellent resistance to scratches and wear. These fittings are guaranteed to turn heads!







Brass polished



Brass matte



Rosé-gold polished



Rosé-gold matte



Dark-bronze polished



Dark-bronze matte



Black polished



Black matte





It's time for colour.

HAFI SoftTouch

With the SoftTouch surfaces – Made in Germany – we not only add colour to the daily stainless steel experience, we also add a touch & feel element. The SoftTouch surface, with its irresistible matte finish, seems to invite you touch it. It feels good in your hand with its exceptionally soft and warm surface, providing a definite feel-good factor.

In addition to the wow-effect that comes with touching it, the SoftTouch finish conveys very high value and can be adapted to all interior designs with custom colour selection.

Standard colours

The HAFI SoftTouch surface is available in five standard colours that you can find on the back of the "Touch me" card.

Do you have a custom colour in mind?

Be sure to ask us about it!

HAFI standard colours:

If you can't find a SoftTouch sample card here, simply contact us at vertrieb@ hafi.de with the key words "SoftTouch Sample".

Safety first

HAFI protective fittings - Tested. Certified. Safe.

Break-in security





Protective fittings should effectively hinder forcible turning of the profile cylinder and a mechanical attack on the lock. HAFI protective fittings are recommended by the Bavarian Criminal Police Bureau, and are documented in the list of "protective fittings inspected and certified to DIN 18257".

Protective fittings certified to DIN 18257 are classified in the resistance classes ES 0 to ES 3, and/or certified to DIN EN 1906 (SK1 to SK4). Protective fittings from resistance class ES 1 and up are recommended.

Fire protection



Fire protection fittings certified to DIN 18273 are components of the state building codes and/or Model Administrative Provisions - Technical Building Rules (MVVTB) and require a mark of conformity (ÜZ) as a usage certificate.

In accordance with this legal guideline, HAFI fire protection fittings are quality-monitored and have a mark of conformity issued by the material testing agency NRW.

Emergency exit





Panic fitting combinations certified to Norm DIN EN 179 are utilised for emergency exits, where panic situations can be reckoned with.

HAFI offers you a wide, extensive and multi-trade assortment with corresponding testing and certifications for the combination of approved fitting packages certified to Norm DIN EN 179.



classic

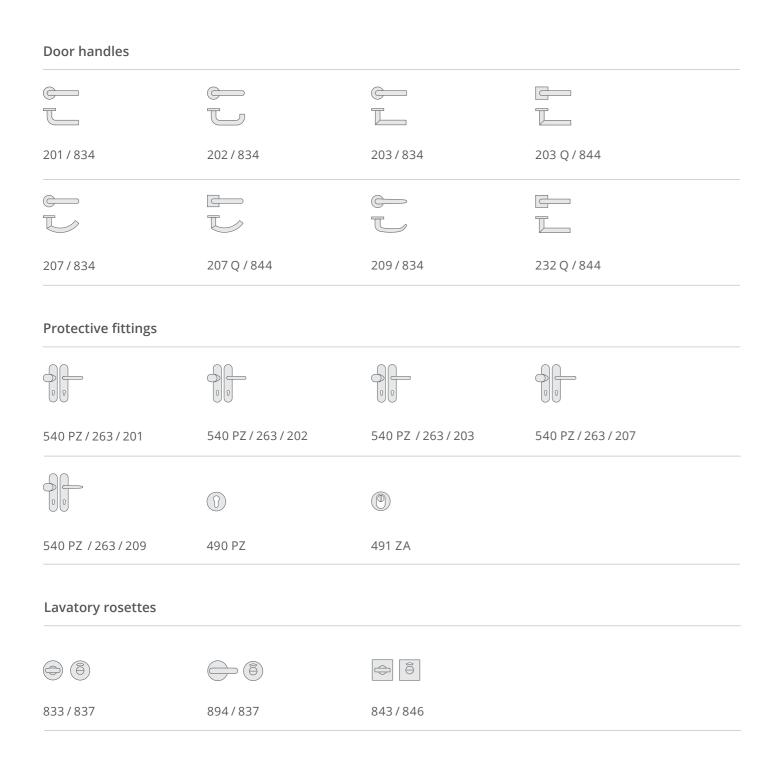

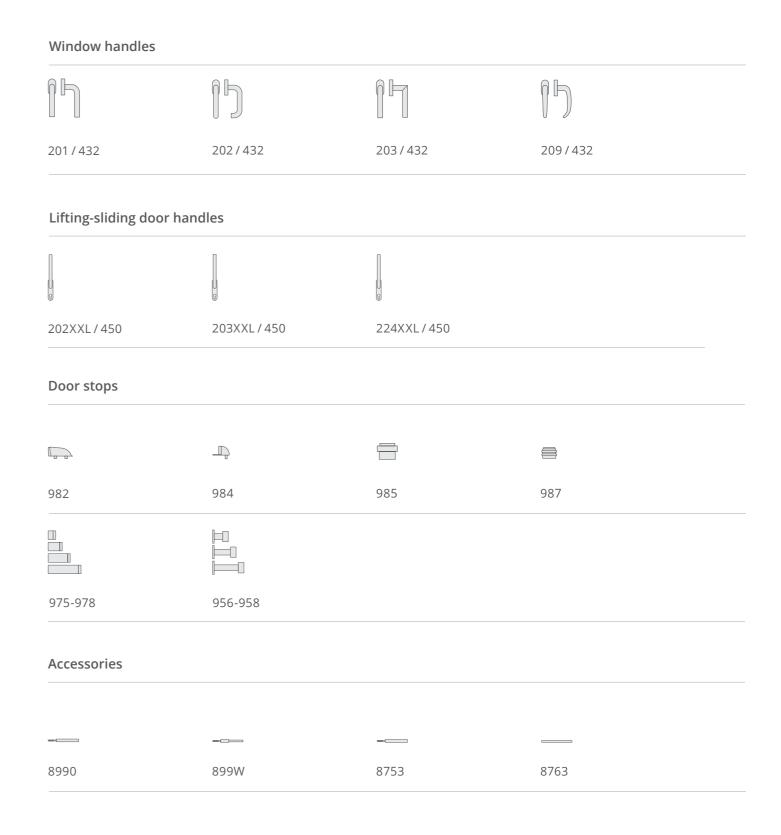

16







Design 201 - HAFI Living Space

HAFI Living Space stainless steel handle fittings swivel-mounted as a rosette fitting with steel slide bearing and spring support. Base structure made from galvanised steel, continuous screwing with firmly pressed threaded cam and through cam, invisible mounting.

tested to DIN EN 1906 User Category Class 3

Classification key 37-0140A

Door thickness 37 - 52 mm

Stainless steel matte Stainless steel polished optional SoftTouch

Door handle fittings

Illustration	Model	round rosette		Fire protection	
		1-piece	2-piece		
	201 / 834 / 835	•	-	•	

Knob-handle fittings

Illustration Model	round rosette		Fire protection <a>_		
		1-piece	2-piece		
	201 / 280 / 834	•	-	•	
₩ 00	201 / 285 / 834	•	-	•	
	201 / 288 / 834	•	-	•	

Bathroom fittings

Illustration	Model	round rosette		Fire protection
		1-piece	2-piece	
	201 / 834 / 836 / 837	•	-	-







Design 202 - HAFI Living Space

HAFI Living Space stainless steel handle fittings swivel-mounted as a rosette fitting with steel slide bearing and spring support. Base structure made from galvanised steel, continuous screwing with firmly pressed threaded cam and through cam, invisible mounting.

tested to DIN EN 1906 User Category Class 3

Classification key 37-0140A

Door thickness 37 - 52 mm

Stainless steel matte Stainless steel polished Optional SoftTouch

PZ

RZ O

Euro

0

3B

(8)

Door handle fittings

Illustration	Model	round rosette		Fire protection 	
		1-piece	2-piece		
	202/834/835	•	-	•	

Knob-handle fittings

	5				
Illustration	Model	round	rosette	Fire protection	
		1-piece	2-piece		
	202/280/834	•	-	•	
₩ 0₩ 00	202 / 285 / 834	•	-	•	
	202/288/834	•	-	•	

Illustration	Model	round rosette		Fire protection	
		1-piece	2-piece		
◯ (5) (8) (8) (1) (1) (1) (1) (1) (1) (1) (1) (1) (1	202 / 834 / 836 / 837	•	-	-	









Design 203 - HAFI Living Space

HAFI Living Space stainless steel handle fittings swivel-mounted as a rosette fitting with steel slide bearing and spring support. Base structure made from galvanised steel, continuous screwing with firmly pressed threaded cam and through cam, invisible mounting.

tested to DIN EN 1906 User Category Class 3

3 7 - 0 1 4 0 A Classification key

Door thickness 37 - 52 mm

■ Stainless steel matte ■ Stainless steel polished ◆ optional SoftTouch

Door handle fittings

Illustration	Model	round rosette		Fire protection	
		1-piece	2-piece		
	203/834/835	•	•	•	

Knob-handle fittings

Illustration	Model	round rosette		Fire protection
		1-piece	2-piece	
	203 / 280 / 834	•	•	•
	203 / 285 / 834	•	•	•
	203/288/834	٠	•	•

Bathroom fittings

Illustration	Model	round rosette		Fire protection
		1-piece	2-piece	
□ (□ (□ (□ (□ (□ (□ (□ (□ (□ (□ (□ (□ (□	203 / 834 / 836 / 837	•	•	-





Design 203 Q - HAFI Living Space

HAFI Living Space stainless steel handle fittings swivel-mounted as a rosette fitting with steel slide bearing and spring support. Base structure made from galvanised steel, continuous screwing with firmly pressed threaded cam and through cam, invisible mounting.

tested to DIN EN 1906 User Category Class 3

37-0140A Classification key

Door thickness 37 - 52 mm

Stainless steel matte
Stainless steel polished
Optional SoftTouch







8

Door handle fittings

Illustration	Model	square rosette		Fire protection 	
		1-piece	2-piece		
	203 Q / 844 / 845	•	•	•	

Knob-handle fittings

Illustration	Model	square rosette		Fire protection	
		1-piece 2-piece			
O O	203 Q / 283 / 844	•	•	•	
	203 Q / 288 / 844	•	•	•	

Illustration	Model	square rosette		Fire protection
		1-piece	2-piece	
□ ⑤	203 Q / 844 / 846 / 847	•	•	-











Design 207 - HAFI Living Space

HAFI Living Space stainless steel handle fittings swivel-mounted as a rosette fitting with steel slide bearing and spring support. Base structure made from galvanised steel, continuous screwing with firmly pressed threaded cam and through cam, invisible mounting.

tested to DIN EN 1906 User Category Class 3

3 7 - 0 1 4 0 A Classification key

Door thickness 37 - 52 mm

Stainless steel matte Stainless steel polished Optional SoftTouch

Door handle fittings

Illustration	Model	round rosette		Fire protection	
		1-piece	2-piece		
	207/834/835	•	•	•	

Knob-handle fittings

Illustration	Model	round	rosette	Fire protection.	
		1-piece	2-piece		
	207 / 280 / 834	•	•	•	
₩ 00	207 / 285 / 834	•	•	•	
	207 / 288 / 834	•	•	•	

Bathroom fittings

Illustration	Model	round rosette		Fire protection
		1-piece	2-piece	
(a) (b) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	207/834/836/837	•	•	-





Design 207 Q - HAFI Living Space

HAFI Living Space stainless steel handle fittings swivel-mounted as a rosette fitting with steel slide bearing and spring support. Base structure made from galvanised steel, continuous screwing with firmly pressed threaded cam and through cam, invisible mounting.

tested to DIN EN 1906 User Category Class 3

37-0140A Classification key

Door thickness 37 - 52 mm

Stainless steel matte Stainless steel polished optional SoftTouch

8

Door handle fittings

Illustration	Model	square rosette		Fire protection E	
		1-piece	2-piece		
00	207 Q / 844 / 845	•	•	•	

Knob-handle fittings

Illustration	Model	square rosette		Fire protection	
		1-piece	2-piece		
	207 Q / 283 / 844	٠	•	•	
	207 Q / 288 / 844	•	•	•	

Illustrat	tion	Model	square	rosette	Fire protection	
			1-piece	2-piece		
	8	207 Q / 844 / 846 / 847	•	•	-	











Design 209 - HAFI Living Space

HAFI Living Space stainless steel handle fittings swivel-mounted as a rosette fitting with steel slide bearing and spring support. Base structure made from galvanised steel, continuous screwing with firmly pressed threaded cam and through cam, invisible mounting.

tested to DIN EN 1906 User Category Class 3										
Classification	n key	37-014	0 A							
Door thickne	ess 37 - 52 mn	n								
Stainless	steel matte	Stainles	s steel p	olished	optional SoftTouc	h				
PZ (i)	RZ O	Euro	(0)	ВВ	(8)					

Door handle fittings

Illustration	Model	round rosette		Fire protection E	
		1-piece	2-piece		
	209/834/835	•	-	•	

Knob-handle fittings

Illustration	Model	round rosette		Fire protection	
		1-piece	2-piece		
	209 / 280 / 834	•	-	•	
	209 / 285 / 834	•	-	•	
	209 / 288 / 834	٠	-	•	

Bathroom fittings

Illustration	Model	round	rosette	Fire protection
		1-piece	2-piece	
	209 / 834 / 836 / 837	•	-	-







Design 232 Q - HAFI Living Space

HAFI Living Space stainless steel handle fittings swivel-mounted as a rosette fitting with steel slide bearing and spring support. Base structure made from galvanised steel, continuous screwing with firmly pressed threaded cam and through cam, invisible mounting.

tested to DIN EN 1906 User Category Class 3					
Classification key 37-0140A					
Door thickness 37 - 52 mm					
Stainless s	steel matte	Stainless steel polished	optional SoftTouch		
PZ	RZ O	Euro BB	8		

Door handle fittings

Illustration	Model	square	rosette	Fire protection
		1-piece	2-piece	
00	232 Q / 844 / 845	-	•	-

Knob-handle fittings

Illustration	Model	square	rosette	Fire protection [
		1-piece	2-piece	
	232 Q / 283 / 844	-	•	-
	232 Q / 288 / 844	-	•	-

Illustration	Model	square	rosette	Fire protection	
		1-piece	2-piece		
⊕ 6	232 Q / 844 / 846 / 847	-	•	-	











Design lavatory rosettes, invisible mounting

with red /white display

Stainless steel matte Stainless steel polished optional SoftTouch



Design 201 - HAFI Living Space

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm (free pin length 24 | 30 | 32 | 35 mm).

Stainless steel matte Stainless steel polished Optional SoftTouch



Design 894 / 836 HAFI Living Space

Design lavatory rosettes, invisible mounting

with extra long latch

with red /white display

Stainless steel matte Stainless steel polished Optional SoftTouch



Design 202 - HAFI Living Space

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm (free pin length 24 | 30 | 32 | 35 mm).

Stainless steel matte Stainless steel polished Optional SoftTouch





Design 847 / 846 HAFI Living Space

Design lavatory rosettes, invisible mounting

with red /white display

Stainless steel matte Stainless steel polished Optional SoftTouch



Design 203 - HAFI Living Space

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm (free pin length 24 | 30 | 32 | 35 mm).

Stainless steel matte Stainless steel polished optional SoftTouch



Design 209 - HAFI Living Space

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm (free pin length 24 | 30 | 32 | 35 mm).

Stainless steel matte Stainless steel polished optional SoftTouch





Design 540 PZ | Handle 201 | Knob 263



Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished optional SoftTouch



Design 540 PZ | Handle 202 | Knob 263







Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte
Stainless steel polished
optional SoftTouch

Door handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
0 0	201 / 201 / 544 PZ	37-0152U	47-0153U	•
0	201 / 201 / 545 ZA	37-0152U	47-0153U	•

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection 🗉
0 0	263 / 201 / 540 PZ	37-0152U	4 7 - 0 1 5 3 U	•
9	263 / 201 / 541 ZA	3 7 - 0 1 5 2 U	4 7 - 0 1 5 3 U	•

Door handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection 🗉
0 0	202 / 202 / 544 PZ	37-0152U	47-0153U	•
00	202 / 202 / 545 ZA	3 7 - 0 1 5 2 U	47-0153U	•

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection 🗉
0 0	263 / 202 / 540 PZ	3 7 - 0 1 5 2 U	[4 7 - 0 1 5 3 U	•
0	263 / 202 / 541 ZA	3 7 - 0 1 5 2 U	4 7 - 0 1 5 3 U	•





Design 540 PZ | Handle 203 | Knob 263



Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished optional SoftTouch



Design 540 PZ | Handle 207 | Knob 263







Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte
Stainless steel polished
Optional SoftTouch

Door handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection 🗉
00	203 / 203 / 544 PZ	3 7 - 0 1 5 2 U	[4 7 - 0 1 5 3 U	•
9	203 / 203 / 545 ZA	37-01520	4 7 - 0 1 5 3 U	•

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
0 0	263 / 203 / 540 PZ	37-0152U	47-0153U	•
	263 / 203 / 541 ZA	37-0152U	47-0153U	•

Door handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection 🗉
0 0	207 / 207 / 544 PZ	37-0152U	[4 7 - 0 1 5 3 U	•
9	207 / 207 / 545 ZA	3 7 - 0 1 5 2 U	[4 7 - 0 1 5 3 U	•

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
0 0	263 / 207 / 540 PZ	3 7 - 0 1 5 2 U	47-0153U	•
0	263 / 207 / 541 ZA	3 7 - 0 1 5 2 U	47-0153U	•





Design 540 PZ | Handle 209 | Knob 263





Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished optional SoftTouch

Door handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection E
00	209 / 209 / 544 PZ	[3 7 - 0 1 5 2 U	4 7 - 0 1 5 3 U	•
(a)	209 / 209 / 545 ZA	3 7 - 0 1 5 2 U	47-0153U	•

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
0 0	263 / 209 / 540 PZ	37-01520	47-0153U	•
0	263 / 209 / 541 ZA	3 7 - 0 1 5 2 U	47-0153U	•









Protective rosettes without core pulling protection, solid interior

rosette, concealed screws

Protection class SK2 (ES1)

PZ or RZ hole

Design 490 / 499

Stainless steel matte optional SoftTouch

490 PZ

499 PZ







499 RZ





Design 491 / 499

Protective rosette with cylinder cover ZA (with core pulling protection), for cylinder protrusion 14 - 18 mm, solid interior rosette, concealed screws

Protection class SK2 (ES1)

Stainless steel matte

optional SoftTouch

491



499 PZ





HAFI [

Design 202XXL / 450 / 451

Lifting-sliding door handles, with 180° or alternative 90° locking mechanism, swivel-mounted, square pin 10 mm, with or without through cam and/or threaded cam and M5 screws, invisible mounting.

Stainless ste	el matte 📃 Stair	nless steel polished	optional SoftTouch
PZ	RZ	Blank	
0	0		



Design 203XXL / 450 / 451

Lifting-sliding door handles, with 180° or alternative 90° locking mechanism, swivel-mounted, square pin 10 mm, with or without through cam and/or threaded cam and M5 screws, invisible mounting.

Stainless stee	el matte 📃 Stainless	s steel polished	optional SoftTouc
PZ	RZ	Blank	
0			



Design 224XXL / 450 / 451

Lifting-sliding door handles, with 180° or alternative 90° locking mechanism, swivel-mounted, square pin 10 mm, with or without through cam and/or threaded cam and M5 screws, invisible mounting.

Stainless stee	el matte 📃 Stainle	ss steel polished 🕠 optional S	oftTou
PZ	RZ	Blank	
0	0		

35





Design 982

Ground door stop, including screws and dowels

matching shim for door stop available

Stainless steel matte

optional SoftTouch



Design 984

Ground door stop, including screws and dowels

Stainless steel matte

optional SoftTouch



Design 985

Ground door stop

including hanger bolt M10 x 80 mm and plastic dowel 12 x 60 mm

Stainless steel matte

Optional SoftTouch



Design 987

Ground and/or wall door stop, including screws and dowels

Stainless steel matte

O optional SoftTouch





Design 975 - 978

Wall door stop with white or black rubber, including screws and dow-

Stainless steel matte	optional SoftTouch
Design 975	L 26 mm
Design 976	L 60 mm
Design 977	L 90 mm
Design 978	L 120 mm



Design 956 - 958

Design 958

Wall door stop with white or black rubber, including screws and dowels

Ø 30 mm or Ø 40 mm	
Stainless steel matte	optional SoftTouch
Design 956	L 60 mm
Design 957	L 90 mm

L 120 mm

36



TO DESIGN

HAFI Square pin 8990

Square pin for knob-handle fittings

8 x	70 mm	9 x	70 mm
8 x	90 mm	9 x	90 mm
8 x	110 mm	9 x	110 mm
8 x	130 mm	9 x	130 mm
8 x	150 mm	9 x	150 mm



HAFITE DIN EN 1904



HAFI Extension piece for handle fittings

Extension piece for handle fittings differing from standard door thickness (37 - 50 mm)

Square pin 8 mm

Extension piece

Exterision piece	
Set 1 (105464)	Door thickness 51 - 60 mm
Set 2 (105465)	Door thickness 61 - 70 mm
Set 3 (105466)	Door thickness 71 - 80 mm



Square pin offset for knob-handle fittings

8 / 8.5 x	70 mm
8 / 8.5 x	90 mm
8 / 10 x	110 mm



HAFI Extension piece for knob-handle fittings

Extension piece for knob-handle fittings differing from standard door thickness (37 - 50 mm)

Square pin 8 mm

Extension piece

Door thickness 51 - 60 mm
Door thickness 61 - 70 mm
Door thickness 71 - 80 mm

Flush Line

HAFI Flush Line - Flush-mounted aesthetics and reduced rosette design.

We have adopted the design trend of reducing visible structures and have developed a new product line for door, window and lifting-sliding door handles.

The result is a combination of aesthetics, flush-mounted elements and winning easy installation

The various surface variants in stainless steel that is polished, matte-brushed, or lacquered according to RAL request, enable the coverings of both window handles as well as lifting-sliding door handles to melt into one unit with the surface of the door element.

Lifting-sliding door handles



Door handles

With reduced design height of the rosette of just 4 mm with integrated spring function, the Flush Line technology enables unlimited usage for property or fire protection doors.

After the base structure has been attached in or on the door panel, the door handle can be mounted in seconds with the cover rosette with a simple "push-click" function and by tightening a grub screw.







Window handles

The HAFI window handle is swivel-mounted on a base structure with ball catch with invisible grub screws.

The patented "push-push" function enables installation and disassembly of the cover without tools thanks to the easy latching of the rosette onto the base structure.

With flush-mounting the focus is shifted to the respective window handle design.





in perfection.

Clear and streamlined – in line with minimalism – introducing HAFI Flush Line technology.

Lacquered in the same colour, the cover and the frame melt into one.






Change it.


With our "Push & Click" technology you can switch out door handles faster than ever before!

This way any door handle can be switched at any time to match the interior design – in seconds. Once the base structure of the Flush Line has been mounted, handles can be attached as desired by pushing and clicking with "Push & Click".

The only tool that is needed is an Allen key, in order to tighten the clipped-on handle.

- Choose the shape! Round or square?
- 2. Select your door handle model. Elegant, modern or timeless?
- 3. Select your surface.
 SoftTouch, PVD or classic stainless steel?
- Depending on the selected surface, you can select your customised colour choice!
- Once our Flush Line base structure is mounted you can simply clip your new door handle on, tighten the grub screw & you're done!










Push & Click!

exclusive

Door handles

215 / 870	218L/870	218L Q / 880	228/870
228 Q / 880	241 Q / 880	245 / 870	245 Q / 880
247 / 870	248 / 870	311 / 870	212 / 880

Protective fittings

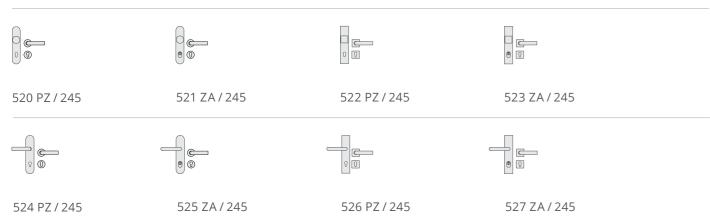

Window handles

	218L / 430	218L Q / 431	228/430	228 Q / 431
241 / 450	A 🕞		@ lb_	

Lifting-sliding door handles









Design 215 Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification key

47-B140B

Door thickness 38 to max. 70 mm

Stainless steel matte

Stainless steel polished PVD

SoftTouch

Euro

Door handle fittings

Illustration	Model	round rosette	Fire protection E	
		1-piece		
	215/870/871	•	•	

Knob-handle fittings

Knob-nandie nitti	iigs			
Illustration	Model	round rosette	Fire protection	
		1-piece		
	215 / 280 / 870	•	•	
	215 / 285 / 870	•	•	
	215 / 288 / 870	•	•	

Bathroom fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
	215/870/873/872	•	-	







Design 218L Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification key

47-B140B

Door thickness 38 to max. 70 mm

Stainless steel matte

Stainless steel polished PVD

SoftTouch

Door handle fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
	218L/870/871	•	•	

Knob-handle fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
	218L/280/870	•	•	
■ 0 H 0 0	218L/285/870	•	•	
	218L/288/870	•	•	

Illustration	Model	round rosette	Fire protection
		1-piece	
	218L/870/873/872	•	-











Design 218L Q Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification l	key	47-B14	0 B		
Door thickness	s 38 to max.	70 mm			
Stainless ste	eel matte	Stainless st	eel polished	O PVD	SoftTouch
PZ	RZ	Euro	0		

Door handle fittings

Illustration	Model	square rosette	Fire protection E	
		1-piece		
00	218L Q / 880 / 881	•	•	

Knob-handle fittings

Illustration	Model	square rosette	Fire protection	
		1-piece		
	218L Q / 283 / 880	•	•	
	218L Q / 288 / 880	•	•	

Bathroom fittings

Illustration	Model	square rosette	Fire protection	
		1-piece		
	218L Q /880 /883 /882	•	-	







HAFI (

Design 228 Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Stainless steel matte	Stainless steel polished	O PVD	SoftTouch
Door thickness 38 to max	x. 70 mm		
Classification key	4 7 - B 1 4 0 B		

Door handle fittings

Illustration	Model	round rosette	Fire protection
		1-piece	
	228 / 870 / 871	•	•

Knob-handle fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
	228 / 280 / 870	•	•	
	228 / 285 / 870	•	•	
	228/288/870	•	•	

Illustration	Model	round rosette	Fire protection [
		1-piece		
	228 / 870 / 873 / 872	•	-	







Design 228 Q Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification key

4|7-|B|1|4|0|B

Door thickness 38 to max. 70 mm

Stainless steel matte

RZ

Euro

0

Door handle fittings

Illustration	Model	square rosette	Fire protection E	
		1-piece		
00	228 Q / 880 / 881	•	•	

Knob-handle fittings

Illustration	Model	course recette	Fire protection E	
Illustration	Model	square rosette	Fire protection	
		1-piece		
	228 Q / 283 / 880	•	•	
	228 Q / 288 / 880	•	•	

Bathroom fittings

Illustration	Model	square rosette	Fire protection	
		1-piece		
	228 Q / 880 / 883 / 882	•	-	







Design by **Bastian Scholz**

Design 241 Q Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification key

4|7-|B|1|4|0|B

Door thickness 38 to max. 70 mm

Stainless steel matte

Stainless steel polished PVD

PZ

RZ

Euro

0

F

Door handle fittings

Illustration	Model	square rosette	Fire protection 	
		1-piece		
77	241 Q / 880 / 881	•	•	

Knob-handle fittings

Illustration	Model	square rosette	Fire protection	
		1-piece		
	241 Q / 880 / 883 / 882	•	-	











Design 245 Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification key 47-B140B Door thickness 38 to max. 70 mm Stainless steel matte Stainless steel polished PVD SoftTouch

Door handle fittings

Illustration	Model	round rosette	Fire protection E	
		1-piece		
	245 / 870 / 871	•	•	

Knob-handle fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
	245 / 280 / 870	•	•	
	245 / 285 / 870	•	•	
	245 / 288 / 870	•	•	

Bathroom fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
	245 / 870 / 873 / 872	•	-	







Design 245 Q Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification	key 4	7 - B 1 4 0 B		
Door thicknes	s 38 to max. 7	0 mm		
Stainless st	eel matte	Stainless steel polished	O PVD	SoftTouch
PZ	RZ	Euro 0		

Door handle fittings

Illustration	Model	square rosette	Fire protection [
		1-piece		
	245 Q / 880 / 881	•	•	

Knob-handle fittings

Illustration	Model	square rosette	Fire protection 	
		1-piece		
	245 Q / 283 / 880	•	•	
	245 Q / 288 / 880	•	•	

Illustration	Model	square rosette	Fire protection	
		1-piece		
	245 Q / 880 / 883 / 882	•	-	











Design by **AIA Life Designers**

Design 247 Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification key

4|7|-|B|1|4|0|B

Door thickness 38 to max. 70 mm

Stainless steel matte

Stainless steel polished PVD

SoftTouch

Euro (

Door handle fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
00	247 / 870 / 871	•	•	

Knob-handle fittings

) -			
Illustration	Model	round rosette	Fire protection	
		1-piece		
00	247 / 280 / 870	•	•	
00 00	247 / 285 / 870	•	•	
	247 / 288 / 870	•	٠	

Bathroom fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
	247 / 870 / 873 / 872	•	-	





Design by Jean-Michel Wilmotte

Design 248 Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

Classification key

4|7|-|8|1|4|0|B

Door thickness 38 to max. 70 mm

Stainless steel matte

Stainless steel polished PVD

PZ

RZ

Euro

0

Door handle fittings

Illustration	Model	round rosette	Fire protection 	
		1-piece		
	248 / 870 / 871	•	•	

Knob-handle fittings

Illustration	Model	round rosette	Fire protection	
		1-piece		
	248 / 248K / 870	•	•	

Illustration	Model	round rosette	Fire protection	
		1-piece		
	228 / 870 / 873 / 872	•	-	









STUDIO F·A·PORSCHE

Design 311 Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

47-B140B Classification key Door thickness 38 to max. 70 mm Stainless steel glass-bead blast OPVD

Door handle fittings

Illustration	Model	round rosette	Fire protection E	
		1-piece		
	311/870/871	•	•	

Knob-handle fittings

Illustration	Model	square rosette	Fire protection	
		1-piece		
	311/311K/870	•	•	

Bathroom fittings

Illustration	Model	square rosette	Fire protection	
		1-piece		
	311/870/311WC	•	-	







STUDIO F·A·PORSCHE

Design 212 Flush Line - HAFI Living space exclusive

Maintenance-free door handle fitting with stainless steel base structure and spring pre-load, swivel-mounted, fast installation with the "Push-Click" function, also suitable for flush-mounted installation in the door panel, with rosettes and keyhole plate, invisible mounting.

tested and certified to DIN EN 1906 User Category Class 4

47-B140B Classification key Door thickness 38 to max. 70 mm Stainless steel glass-bead blast OPVD

Door handle fittings

Illustration	Model	square rosette	Fire protection [
		1-piece		
	212 Q / 880 / 881	•	•	

Knob-handle fittings

Illustration	Model	square rosette	Fire protection E	
		1-piece		
	212 Q / 212K / 880	•	•	

Illustration	Model	square rosette	Fire protection
		1-piece	
	212 Q / 880 / 212WC	•	-









Design 218L | 430 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished PVD SoftTouch



Design by **Bastian Scholz**

Design 241 | 430 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished PVD SoftTouch



Design 218L Q | 431 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished OPVD SoftTouch



Design 241 Q | 431 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished OPVD SoftTouch



Design 228 | 430 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished PVD SoftTouch



Design 245 | 430 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished OPVD SoftTouch



Design 228 Q | 431 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished PVD SoftTouch



Design 245 Q | 431 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished PVD SoftTouch





Design by Jean-Michel Wilmotte

Design 248 | 430 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel matte Stainless steel polished PVD SoftTouch

Design 248T | 430 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

■ Stainless steel matte ■ Stainless steel polished ◆ PVD ◆ SoftTouch

Jean-Michel Wilmotte

Design 311 | 430 - HAFI Living space exclusive

Window handles with 90° locking mechanism, cam Ø 10 mm, mounting points 43 mm, square pin 7 mm, free pin length from 24 mm protruding

Stainless steel glass-bead blast OPVD



STUDIO F-A-PORSCHE









Protection classes SK3 (ES2) and SK2 (ES1)

invisible mounting, with knob and door handle.

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished PVD SoftTouch





Design 524 PZ | Handle 245

Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished PVD SoftTouch

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
0 0	280 / 245 / 520 PZ	3 7 - 0 1 5 2 U	47-0153U	•



Design 521 ZA | Handle 245 | Knob 280

Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished PVD SoftTouch



Door handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
	245 / 245 / 524 PZ	3 7 - 0 1 5 2 U	47-0153U	•



Design 525 ZA | Handle 245

Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished PVD SoftTouch

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
	280 / 245 / 521 ZA	37-0152U	[4 7 - 0 1 5 3 U	•

All available door handle and knob models - see page 68 to 69

Door handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
• 0	245 / 245 / 525 ZA	37-0152U	47-0153U	•

All available door handle and knob models - see page 68 to 69















Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Design 522 PZ | Handle 245 | Knob 283

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished PVD SoftTouch

Design 526 PZ | Handle 245

Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished PVD SoftTouch

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
0 0	283 / 245 / 522 PZ	37-0152U	47-0153U	•







Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Design 523 ZA | Handle 245 | Knob 283

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished PVD SoftTouch

Door handle fittings

HAFI (

Illustration	Model	Protection class 2	Protection class 3	Fire protection
0 0	202 / 245 / 526 PZ	3 7 - 0 1 5 2 U	[4 7 - 0 1 5 3 U	•



Design 527 ZA | Handle 245

Protective fitting made from stainless steel, without spring system, invisible mounting, with knob and door handle.

Protection classes SK3 (ES2) and SK2 (ES1)

Square pin 8 mm, square pin 9 mm

PZ or ZA hole | 72 mm or 92 mm

Stainless steel matte Stainless steel polished PVD SoftTouch

Knob-handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
00	283 / 245 / 523 ZA	37-0152U	[4 7 - 0 1 5 3 U	•

All available door handle and knob models - see page 68 to 69

Door handle fittings

Illustration	Model	Protection class 2	Protection class 3	Fire protection
•	202 / 245 / 527 ZA	3 7 - 0 1 5 2 U	4 7 - 0 1 5 3 U	•

All available door handle and knob models - see page 68 to 69











Variations

Knobs

242K / 520 PZ 248K / 520 PZ 263 / 520 PZ 280 / 520 PZ

285 / 520 PZ 286 / 520 PZ 288 / 520 PZ

Door handles


		9	9
201 / 524 PZ	202 / 524 PZ	203 / 524 PZ	207 / 524 PZ
	0		
209 / 524 PZ	218 / 524 PZ	224 / 524 PZ	225 / 524 PZ
	0	0 1	
226 / 524 PZ	227 / 524 PZ	228 / 524 PZ	234 / 524 PZ
0 H		9	
245 / 524 PZ	247 / 524 PZ	248 / 524 PZ	
253 / 524 PZ	490 PZ	491 ZA	

8






Design 203XXL / 460 / 461 HAFI Flush Line Lifting-sliding door handles, with 180° or alternative 90° locking mechanism, swivel-mounted, square pin 10 mm, with or without through cam and/or threaded cam and M5 screws, invisible mounting. Stainless steel matte Stainless steel polished PVD SoftTouch RZ PΖ Blank Design 218XXL / 460 / 461 HAFI Flush Line Lifting-sliding door handles, with 180° or alternative 90° locking mechanism, swivel-mounted, square pin 10 mm, with or without through cam and/or

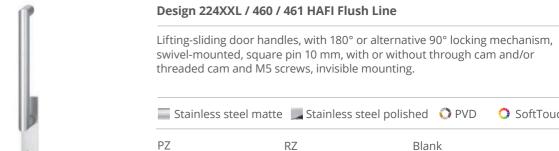

PΖ



■ Stainless steel matte ■ Stainless steel polished ◆ PVD ◆ SoftTouch

Blank



Design 245XXL / 460 / 461 HAFI Flush Line

threaded cam and M5 screws, invisible mounting.

RZ

 \bigcirc

Lifting-sliding door handles, with 180° or alternative 90° locking mechanism, swivel-mounted, square pin 10 mm, with or without through cam and/or threaded cam and M5 screws, invisible mounting.

Stainless ste	el matte 🔲 Stainless st	eel polished 🐧 PVD	SoftTouch
PZ	RZ	Blank	
\bigcirc	0		



CONTACT

HAFI Beschläge GmbH Weissinger Straße 16 D-89275 Elchingen

tel +49 (0) 7308 96 04 0 fax +49 (0) 7308 96 04 15

e-mail info@hafi.de

www.hafi.de